

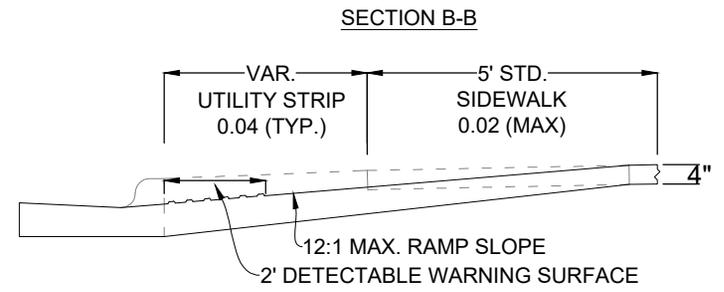


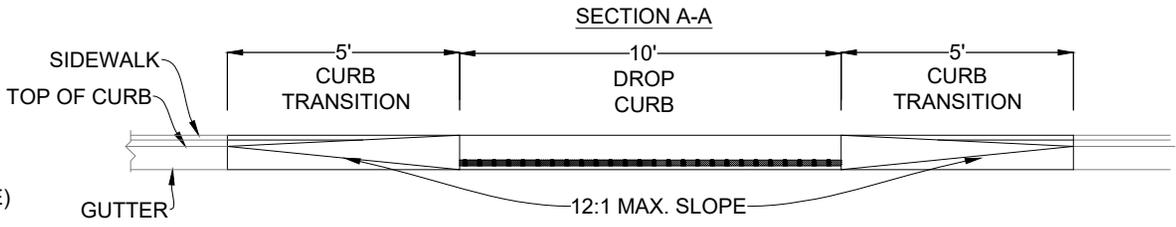

PAY LIMITS FOR CURB RAMP




ISOMETRIC VIEW

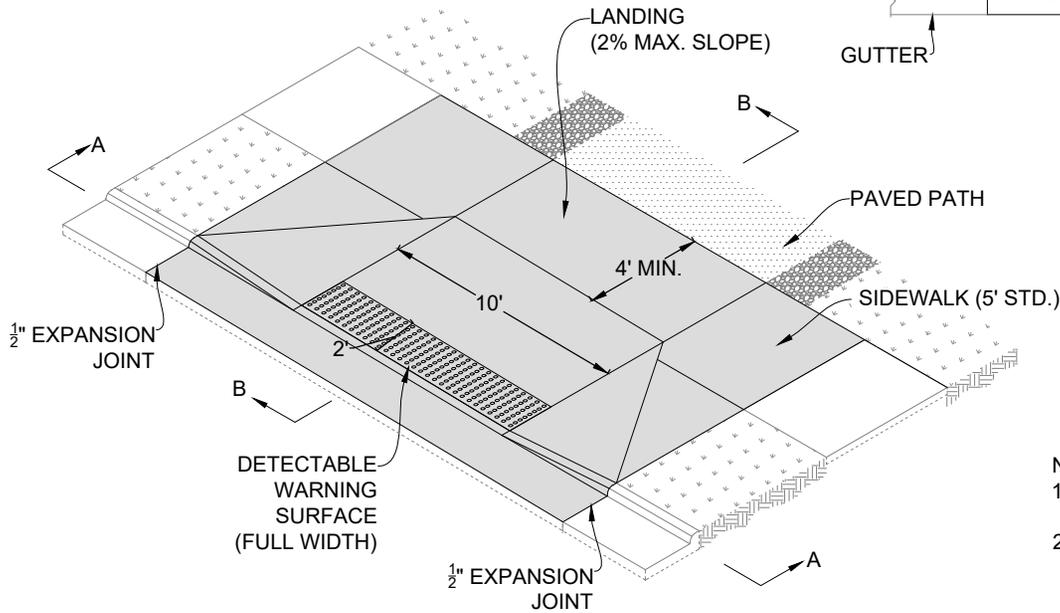

NOTES:

1. RAMPS SHALL BE CONSTRUCTED OF CONCRETE MEETING A MINIMUM COMPRESSION STRENGTH OF 3,000 PSI.
2. DETECTABLE WARNING DOMES WILL CONTRAST VISIBILITY WITH ADJOINING SURFACE, EITHER LIGHT-ON-DARK OR DARK-ON-LIGHT SEQUENCE.

ISOMETRIC VIEW

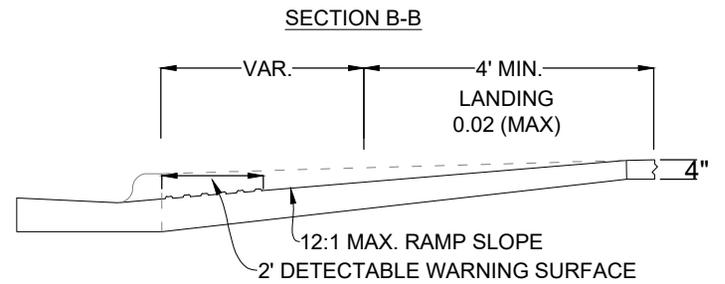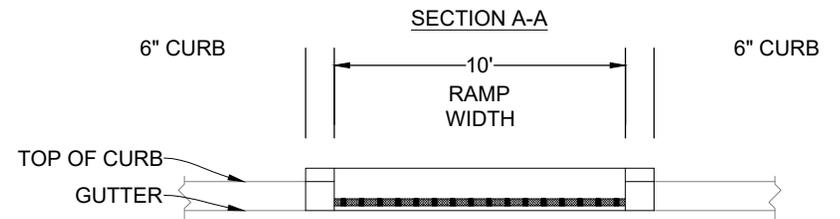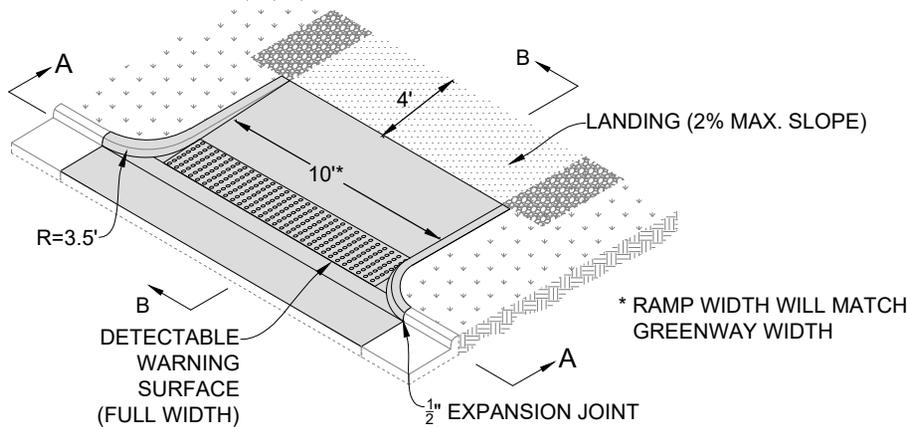

TOWN OF APEX STANDARDS

EFFECTIVE: FEBRUARY 28, 2023

GREENWAY CURB RAMP

STD. NO.

900.07

SHEET 1 OF 2