


PAY LIMITS FOR CURB RAMP

CONCRETE DEPTH	
RAMP/FLARE	6"
LANDING	4"

TYPE N-3

NOTE: USE SMALL FLARES ONLY WHEN A CURB TYPE DIRECTLY CONFLICTS WITH APPROACHING VEHICULAR TURNING MOVEMENTS.

1. RUNNING SLOPE: 5% MIN./8.33% (12:1) MAX.
2. CROSS SLOPE: 2% MAX. RAMPS AND DOMES SHALL BE INSTALLED THE SAME WIDTH AS THE SIDEWALK.
3. CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.
4. CROSS SLOPE NOT TO EXCEED 2% ANY PORTION OF TRANSITION TO STREET.

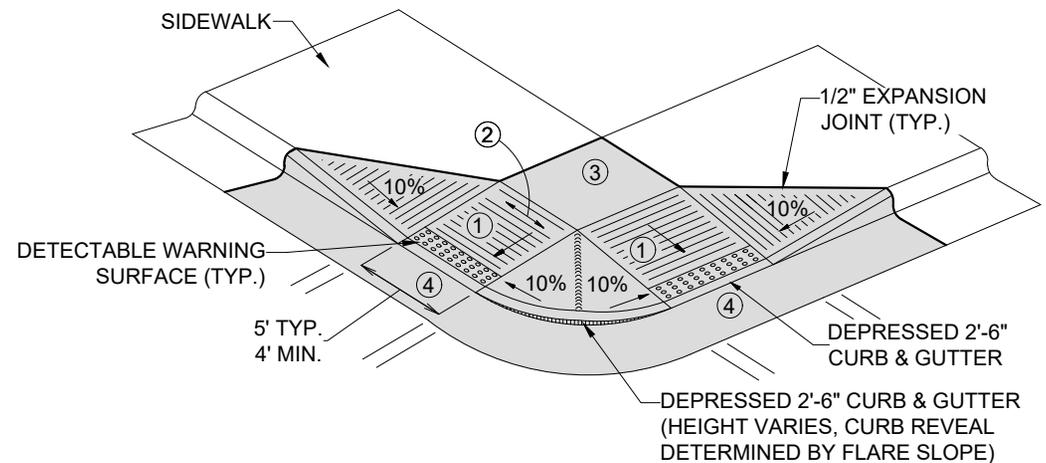

**TYPE N-3A
COMMERCIAL USE**