



INVERTED "U" RACKS

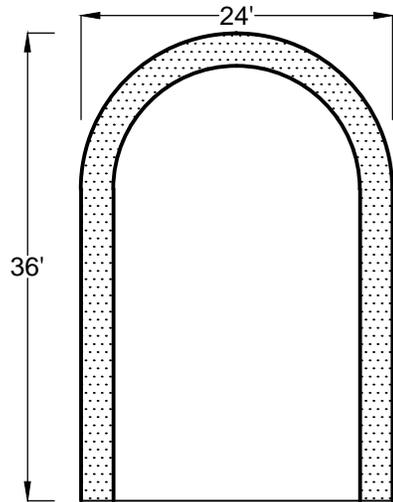

NOTES:

1. PARKING PAD IS 6" CONCRETE SLAB. SIZE SHOWN IS 4'X6' MIN. PAD FOR SINGLE RACK AND 2'-6" ADDITIONAL WIDTH PER RACK FOR RACKS TO BE SPACED 2'-6" O.C. IF MORE THAN ONE.
2. 5' WIDE UNOBSTRUCTED MANEUVERING AREA IS REQUIRED BEHIND RACKS WHEN ORIENTED PARALLEL TO A SIDEWALK AS SHOWN; REQUIRES 4'X11' MIN. PAD.
3. RACKS SHALL BE FLANGE MOUNTED AND SHALL HAVE BLACK POLYESTER POWDER COAT. OTHER PLACEMENTS SHALL MEET MINIMUM SIZE REQUIREMENTS.
4. BICYCLE PARKING SHALL NOT ENCROACH ON ACCESSIBLE PATHS.
5. DESIGNATED PLACEMENT WITHIN PARKING LOTS MAY ALSO BE ACCEPTABLE.

OPTION 1: PERPENDICULAR TO SIDEWALK

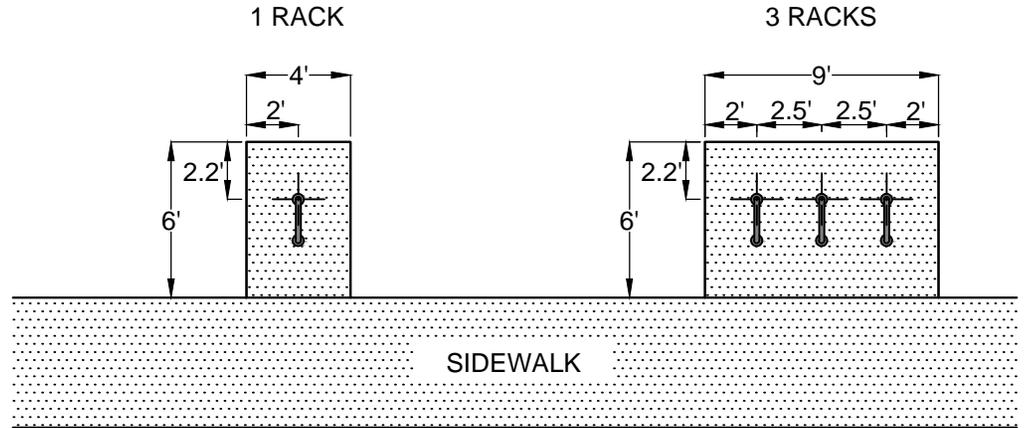

OPTION 2: PARALLEL TO SIDEWALK

