


MAINTENANCE NOTES:

1. REMOVE SEDIMENT WHEN AT $\frac{1}{2}$ HEIGHT OF STONE AND CLEAR HARDWARE OF DEBRIS TO PROVIDE ADEQUATE FLOW FOR SUBSEQUENT RAINS, TAKING CARE NOT TO DAMAGE OR UNDERCUT HARDWARE DURING SEDIMENT REMOVAL.
2. REPLACE STONE AND HARDWARE AS NEEDED.

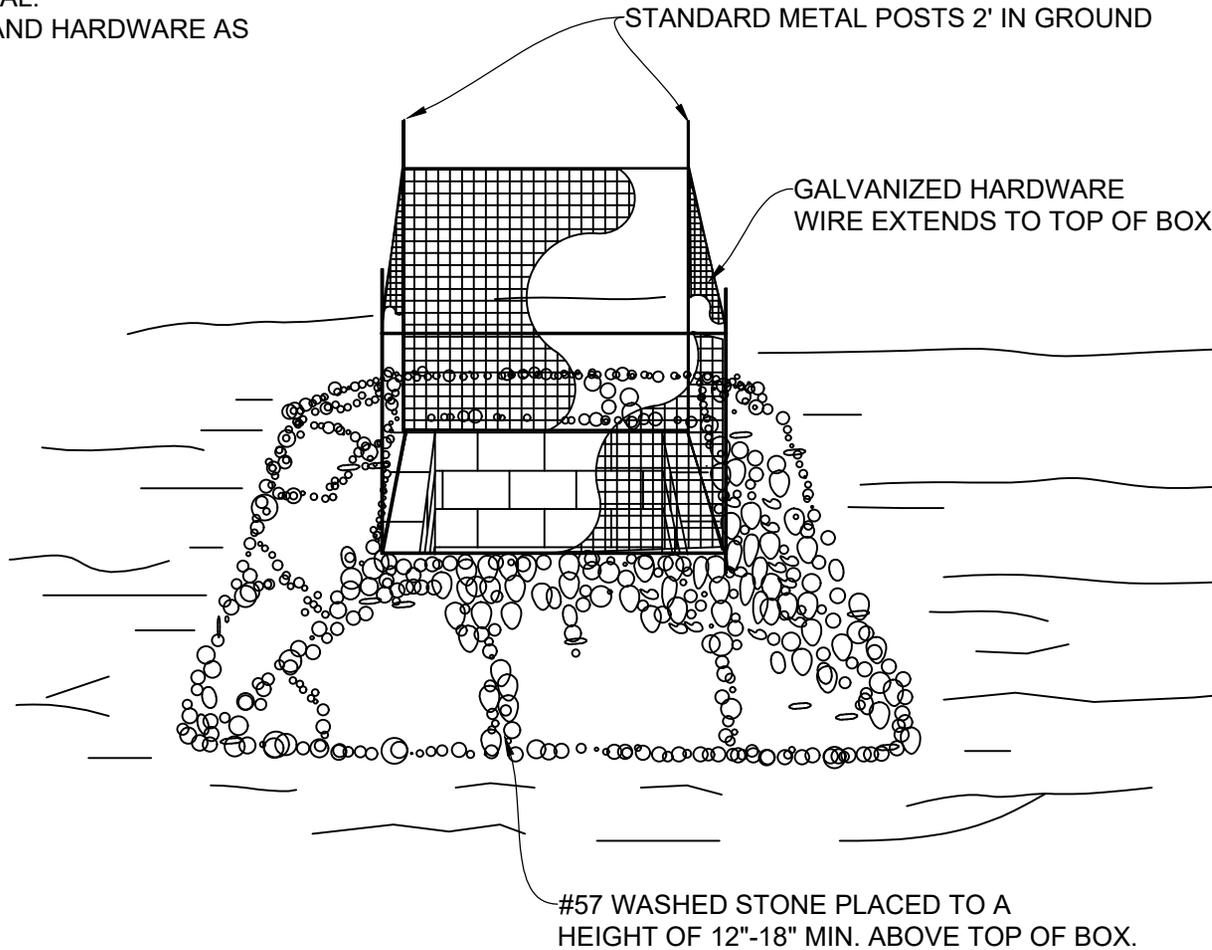

TOWN OF APEX
STANDARDS

EFFECTIVE: JUNE 11, 2024

CATCH BASIN & YARD INLET PROTECTION

STD. NO.

400.04

SHEET 1 OF 1