


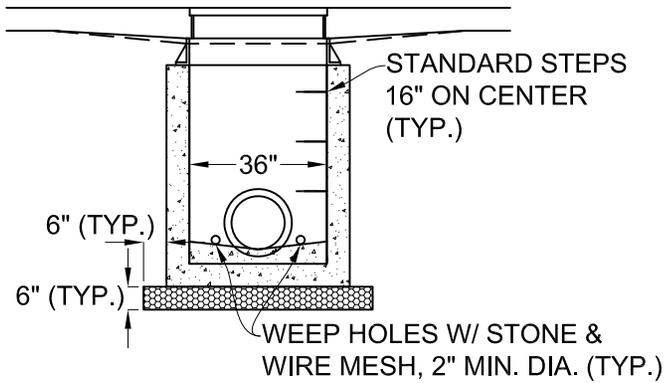






SHALLOW TYPE
(5 FEET OR LESS IN DEPTH)

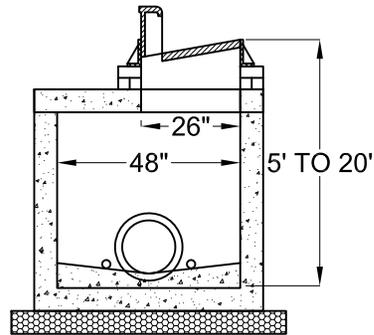

INTERMEDIATE TYPE (4'X4')
(5 FEET TO 20 FEET IN DEPTH)

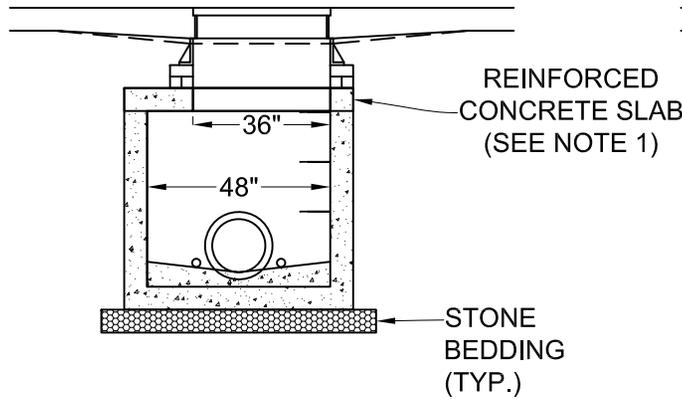

DEEP TYPE (5'X5')
(OVER 20 FEET IN DEPTH)

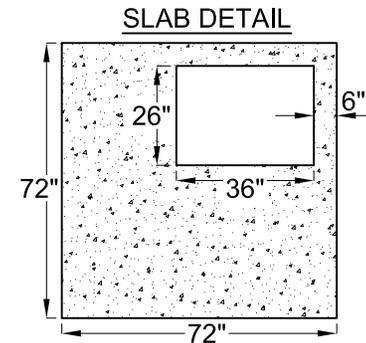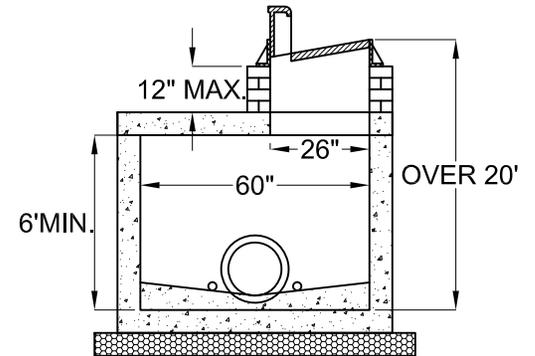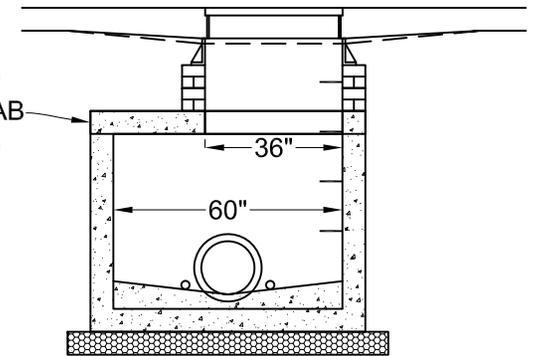

NOTE:

1. SLAB THICKNESS AND REINFORCEMENT FOR SOIL AND TRAFFIC LOADING SHALL BE AS SPECIFIED BY AN ENGINEER AND SHOWN ON PLANS.
2. FRAME, GRATE, & HOOD PER NCDOT STANDARD 840.03.
3. CONCRETE SHALL BE 4000 PSI MIN. FOR ALL PRECAST CONCRETE CATCH BASINS.
4. PRECAST CONCRETE STRUCTURES MAY ONLY BE INSTALLED TO DEPTHS CERTIFIED AS ACCEPTABLE BY THE MANUFACTURER.