



PAY LIMITS FOR CURB RAMP

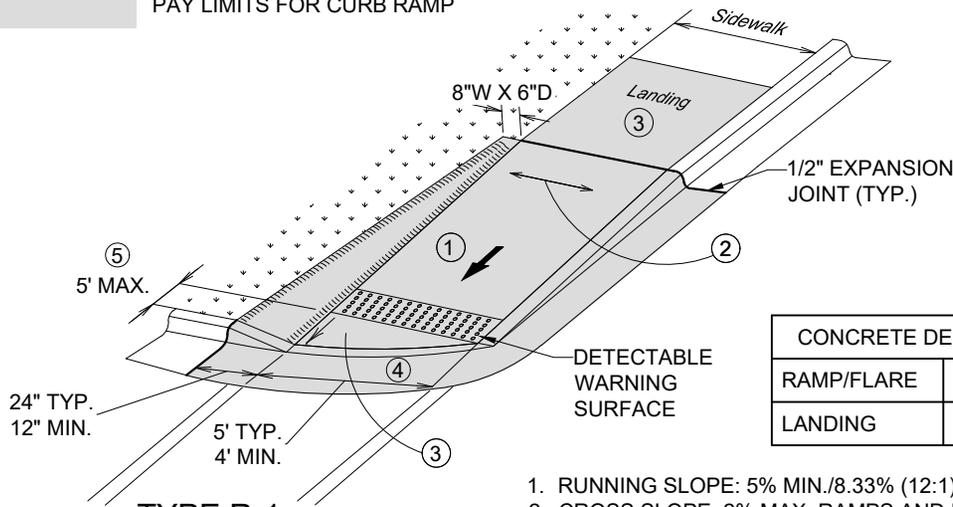


CONCRETE DEPTH	
RAMP/FLARE	6"
LANDING	4"

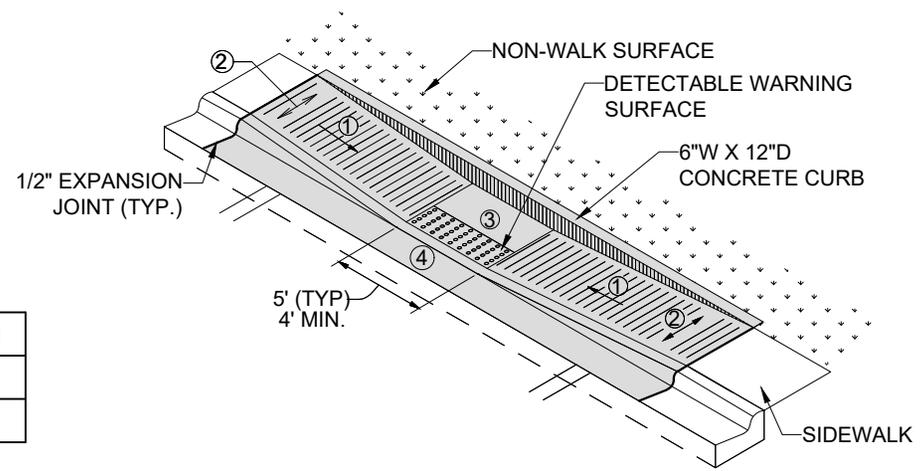


1. RUNNING SLOPE: 5% MIN./8.33% (12:1) MAX.
2. CROSS SLOPE: 2% MAX. RAMPS AND DOMES SHALL BE INSTALLED THE SAME WIDTH AS THE SIDEWALK.
3. CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.
4. CROSS SLOPE NOT TO EXCEED 2% ANY PORTION OF TRANSITION TO STREET.
5. IF LENGTH EXCEEDS 5', TRUNCATED DOMES SHALL BE INSTALLED ALONG THE BACK OF THE CURB COVERING THE FULL WIDTH OF THE RAMP.

TYPE R-2
(USE ONLY WHERE WATER WILL NOT POND WITHIN LANDING)

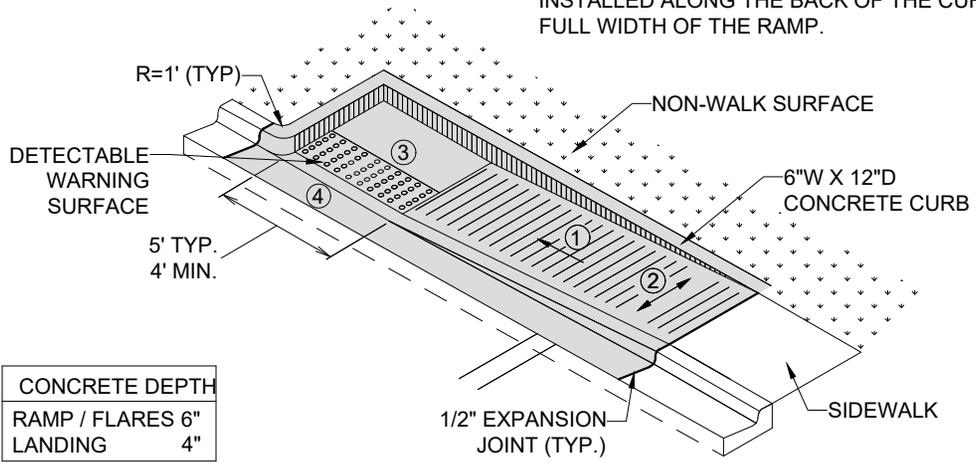

CONCRETE DEPTH	
RAMP / FLARES	6"
LANDING	4"

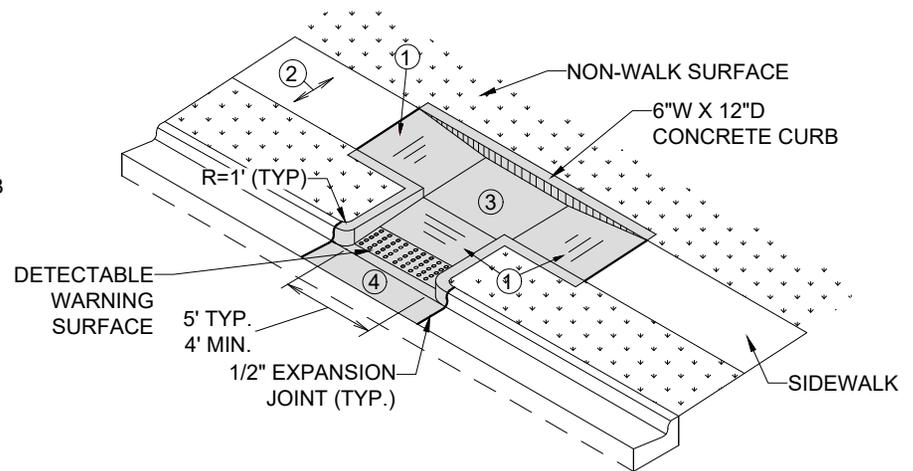

TYPE R-2A

TYPE R-2B