


CONCRETE DEPTH	
SIDE RAMPS	4"
LANDINGS/CURB RAMPS	6"

SMALL RADIUS  
LESS THAN 15'

1. RUNNING SLOPE: 5% MIN./8.33% (12:1) MAX.
2. CROSS SLOPE: 2% MAX. RAMPS AND DOMES SHALL BE INSTALLED THE SAME WIDTH AS THE SIDEWALK.
3. CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.
4. CROSS SLOPE NOT TO EXCEED 2% ANY PORTION OF TRANSITION TO STREET.

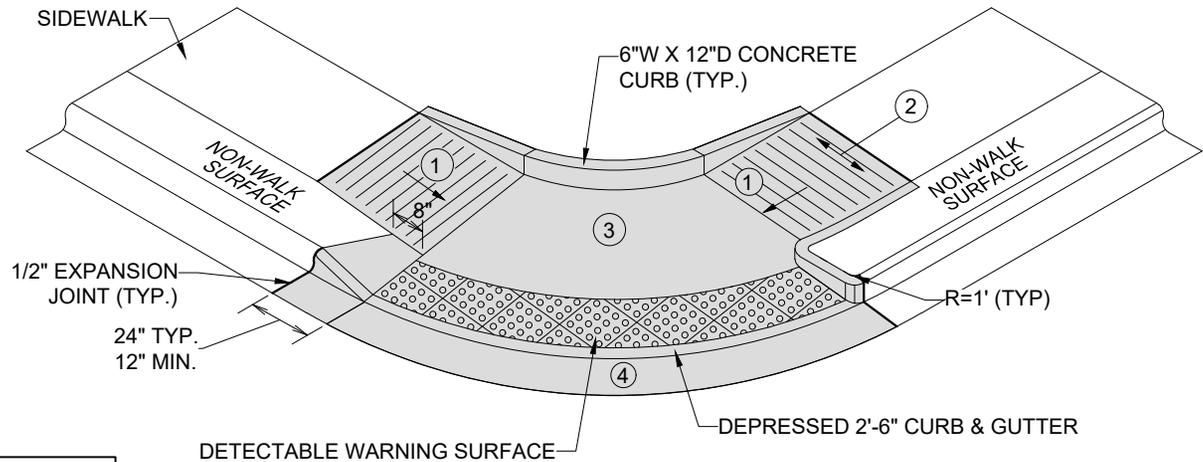

LARGER RADIUS  
15' OR GREATER