
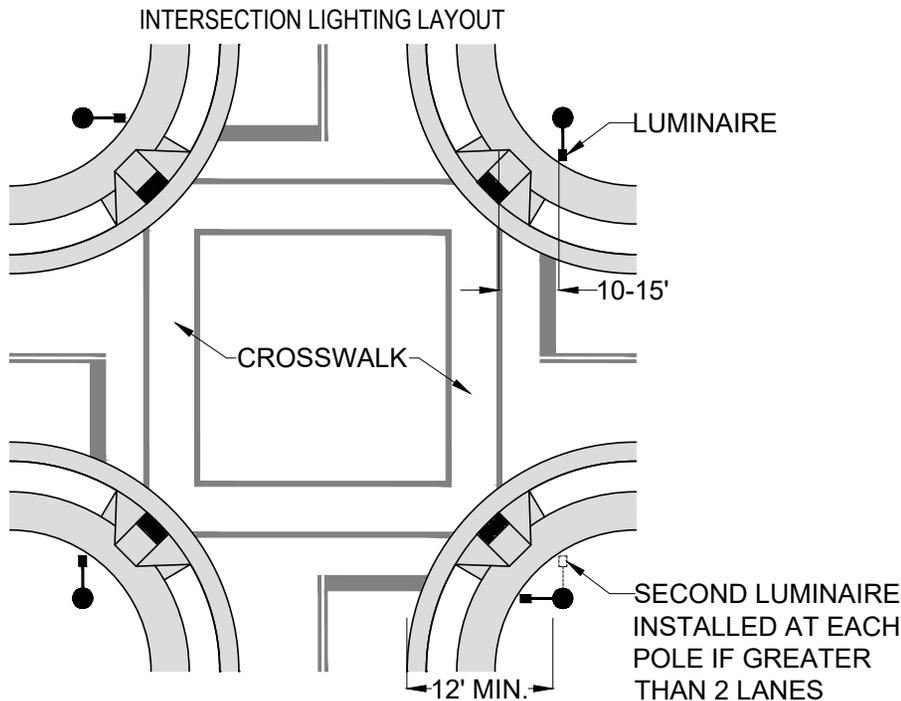


CROSSWALK TYPE	NUMBER OF LANES	NUMBER OF FIXTURES
MIDBLOCK	≥ 2	2
INTERSECTION	2	4
INTERSECTION	> 2	8

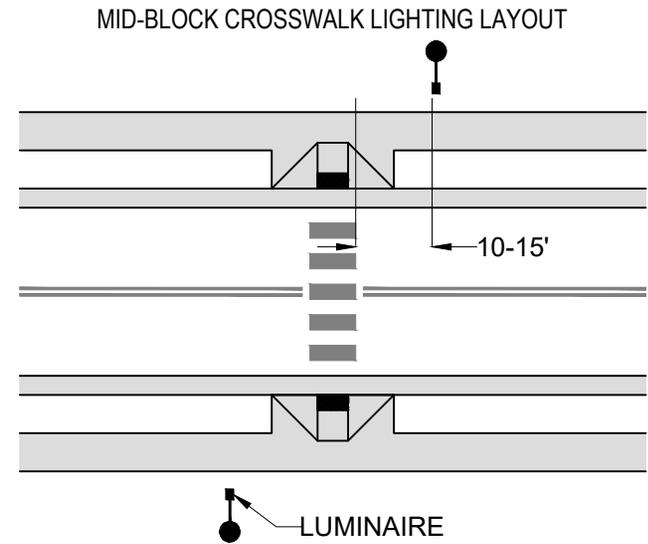

NOTES:

- LUMINAIRES TO BE PLACED A MINIMUM OF 12' FROM THE FACE OF CURB OR EDGE OF TRAVEL LANE. ALL LUMINAIRES WITHIN THE ROADWAY CLEAR ZONE SHALL BE PLACED ON A BREAKAWAY BASE.
- LUMINAIRES FOR CROSSWALKS ARE TO BE LOCATED BETWEEN 10-15 FEET FROM THE CROSSWALK WHERE POSSIBLE.
- LUMINAIRES SHOULD BE PLACED PRIOR TO THE CROSSWALK FROM THE DRIVERS' PERSPECTIVE.
- LUMINAIRE TYPE BY ROADWAY DESIGNATION AND CROSSWALK TYPE:
 - ACROSS THOROUGHFARES AND AT SIGNALIZED INTERSECTIONS: COBRA-HEAD LED, ROADWAY DISTRIBUTION III, 3000K, WITH ~18,000 LUMEN OUTPUT/~150 WATT INPUT.
 - ACROSS MAJOR COLLECTOR STREETS AND YIELD-CONTROLLED OR HIGH-VISIBILITY CROSSWALKS ACROSS MINOR COLLECTOR STREETS AND RESIDENTIAL STREETS: COBRA-HEAD LED, ROADWAY DISTRIBUTION III, 3000K, WITH ~7,000 LUMEN OUTPUT/~50 WATT INPUT.
 - TWO-BAR CROSSWALKS ACROSS RESIDENTIAL AND MINOR COLLECTOR STREETS: LUMINAIRES TO BE LANTERN STYLE, LED, ROADWAY DISTRIBUTION III, 3000K, WITH ~5,000 LUMEN OUTPUT/~50 WATT INPUT. MULTIPLE LUMINAIRES MAY BE NEEDED DEPENDING ON THE ROADWAY CONFIGURATION.