

PLAN

GENERAL NOTES:


1. INSTALL SILT FENCE OR TREE PROTECTION FENCE TO ENSURE CONSTRUCTION ENTRANCE IS USED.
2. IF CONSTRUCTION ENTRANCE DOES NOT REMOVE MUD FROM TIRES EFFECTIVELY, THE TIRES OF THE VEHICLE MUST BE WASHED BEFORE ENTERING PUBLIC ROAD (SEE DETAIL 400.06 SHEET 2 OF 2).
3. IF A PROJECT CONTINUES TO DEPOSIT MUD AND DEBRIS ONTO THE PUBLIC ROAD, THE TOWN WILL CLEAN THE AREA AND INVOICE THE FINANCIALLY RESPONSIBLE PARTY.

MAINTENANCE NOTES:

1. CONSTRUCTION ENTRANCE SHALL BE MAINTAINED ROUTINELY TO AVOID SEDIMENT LEAVING PROJECT.
2. SEDIMENT ENTERING PAVED ROADWAYS FROM PROJECT SHALL BE REMOVED IMMEDIATELY.

ENTRANCE TYPE	L	W	STONE SIZE
GENERAL	50'	25'	2"-3"
RESIDENTIAL*	25'	12'	#57

* INDIVIDUAL SINGLE FAMILY

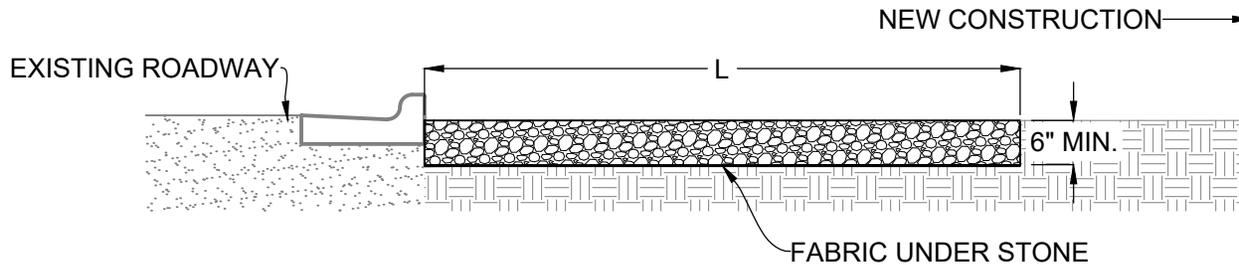

CROSS SECTION

TOWN OF APEX
STANDARDS

EFFECTIVE: JUNE 11, 2024

CONSTRUCTION ENTRANCE

STD. NO.

400.06

SHEET 1 OF 2